


Core cross reference (x = material variation within a size)




Fair-Rite: 94XX375002	Micrometals: E137-X	Magnetics: XX-43515-EC
Nicera: None	Epos: B66370	MMG: 32-320-XX
Ferroxcube: E375-3XXX	TDK: PCXXEE35/28-Z	

Winding Area  
(mm<sup>2</sup>)



LODESTONE PACIFIC  
B-EI375H-12-1-GFN7-L-500



**TOP**

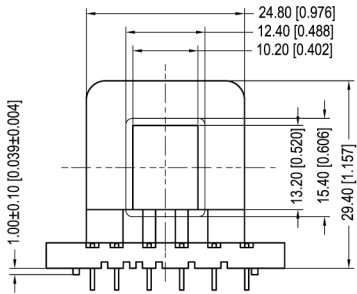

**BOTTOM**

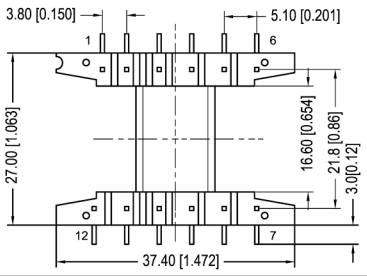

© 2006

	Scale	Tolerance (Inches)	Tolerance (mm)	No. of Terminals	Terminal Plating	Terminal Material	Terminal Type	
	None	.XXX ±.008 .XX ±.012	.XX ±0.20 .X ±0.30	12	100% Tin	CP Wire	L Type	
<p style="text-align: center;"><b>LODESTONE PACIFIC</b></p>					Molding Material	UL File No.	Rating	Class
					Nylon	E154352	UL94-HB	B
<p style="text-align: center;">Lodestone's Part Number</p>							Rev.	
<p style="text-align: center;"><b>B-EI375H-12-1-GFN7-L-500</b></p>							<b>1</b>	

Phone: (714)970-0900. Fax: (714)970-0800  
 4769 Wesley Drive, Anaheim, California, 92807, USA  
 Web: www.lodestonepacific.com E-Mail: sales@lodestonepacific.com