


Core size reference (x = material variation within a size)




Fair-Rite: 94 XX 375002	Micrometals: E137-XX	Magnetics: X-43515-EC
Nicra: None	Epcos: B66370	MMG: 32-320-XX
Ferroxcube: E375-3 XXX	TDK: PC XX EE35/28-Z	

Winding Area (mm<sup>2</sup>)



LODESTONE PACIFIC  
B-EI375H-12-2-PBT



**TOP**

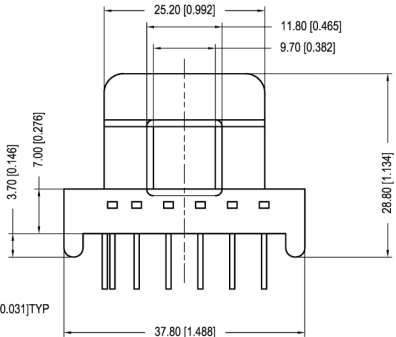

**BOTTOM**



© 2006

	Scale	Tolerance (Inches)	Tolerance (mm)	No. of Terminals	Terminal Plating	Terminal Material	Terminal Type		
	None	.XXX ± 0.08 .XX ± .012	XX ± 0.20 .X ± 0.30	12	100% Tin	CP WIRE	Through Hole		
						Molding Material	UL File No.	Rating	Class
						PBT	E59481	UL94-VO	B
Phone: (714)970-0900. Fax: (714)970-0800 4769 Wesley Drive, Anaheim, California, 92807, USA Web: www.lodestonepacific.com E-Mail: sales@lodestonepacific.com								LoDESTONE's Part Number <b>B-EI375H-12-2-PBT</b>	Rev. <b>1</b>