

STM280-8

Material: Diallyl Phthalate (Black)


Rating: UL 94-VO

8 Terminals: Alloy 42 .020 X .010
Lead Frame
90/10 Tin Plated

Solderability: Per MIL-STD-202 Method 208

Packaging Tray: TY45x70-A

Application: For surface mounting of components and wound toroids up to .280 inches in diameter. This product is shipped from Lodestone Pacific in anti-static shipping tubes. Encapsulation covers are available and sold separately. See page

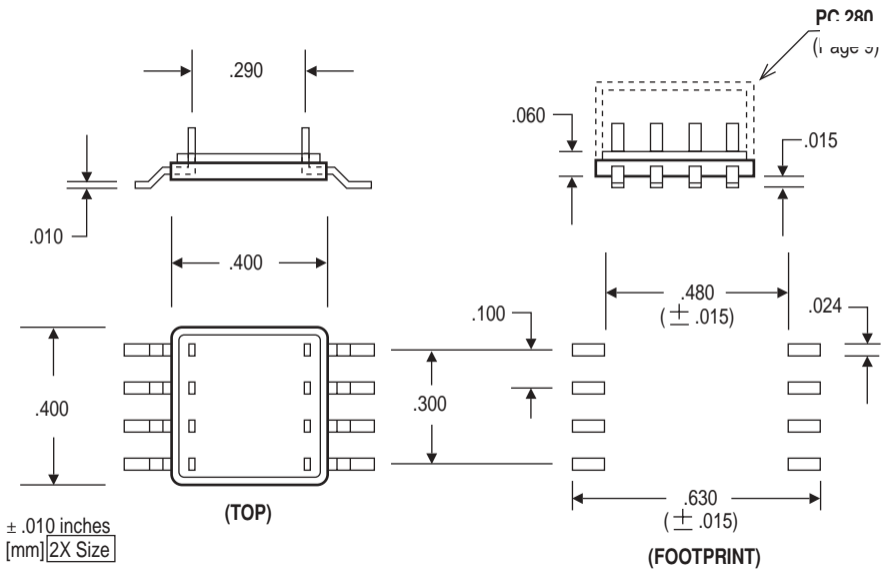

± .010 inches
[mm] 2X Size