

DIP165-6

Material: Diallyl Phthalate
(Black)

Rating: UL94-VO


6 Terminals: Alloy 42 Leadframe
90/10 Tin Plate

Solderability: Per MIL-STD-202
Method 208

Packaging Tray: TY50x50-A

Application: Through hole version of the industry standard "dual-in-line" package. This product is shipped from Lodestone Pacific in anti-static shipping tubes. Encapsulation covers are available and sold separately. See page 9.

TERMINAL ID
MARK \varnothing .060

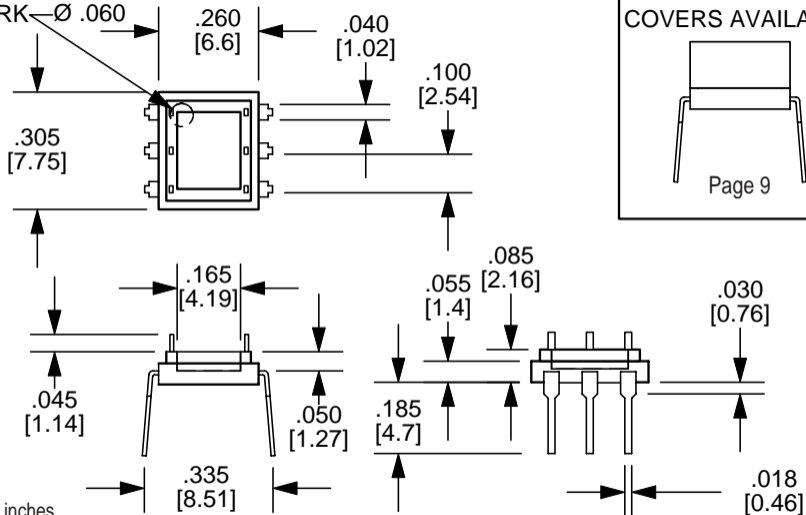

COVERS AVAILABLE



Page 9

\pm .010 inches
[mm] 2X Size