

HTC1208-0 & HTC1208-4

Material: Nylon 6/6
(Natural)


Rating: UL94-VO

4 Terminals: Copper/Zinc
.026 x .026
60/40 Tin Plated

Solderability: Per MIL-STD-202
Method 208

Packaging Tray: None

Application: For enclosed horizontal mounting of toroidal inductors and transformers up to 1.200 inches in diameter. Ideal for potting and part number marking. Available with or without terminals in any of the four locations shown.

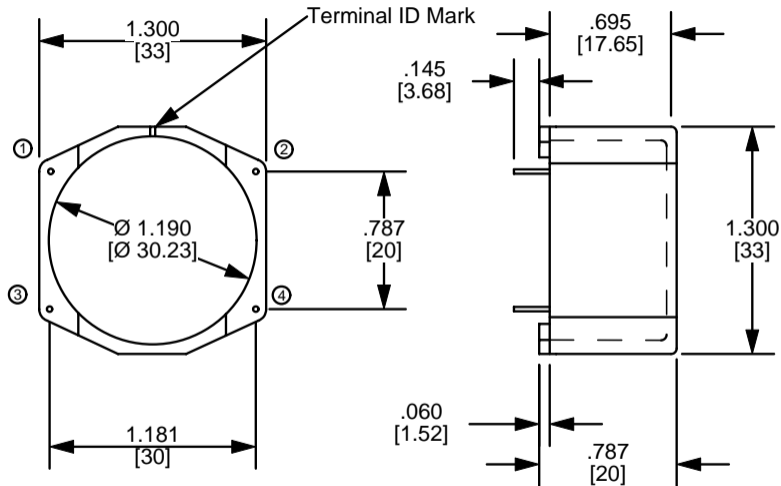

NEW

$\pm .010$ inches
[mm] Not to Scale