

# HTC1500-0 & HTC1500-4

**Material:** Nylon 6/6  
(Natural)


**Rating:** UL94-VO

**4 Terminals:** Copper/Zinc  
.026 x .026  
60/40 Tin Plated

**Solderability:** Per MIL-STD-202  
Method 208

**Packaging Tray:** None

**Application:** For enclosed horizontal mounting of toroidal inductors and transformers up to 1.500 inches in diameter. Ideal for potting and part number marking. Available with or without terminals in any of the four locations shown.

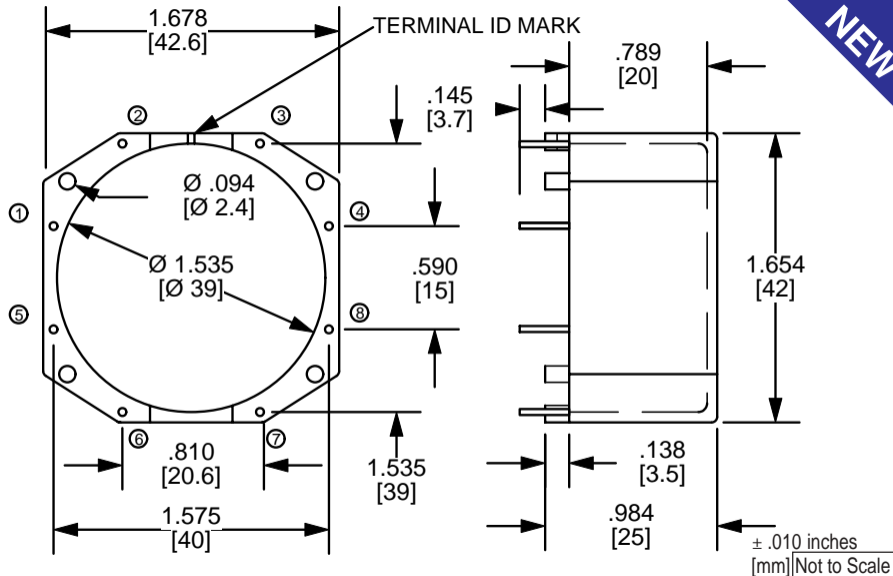

NEW