NEW

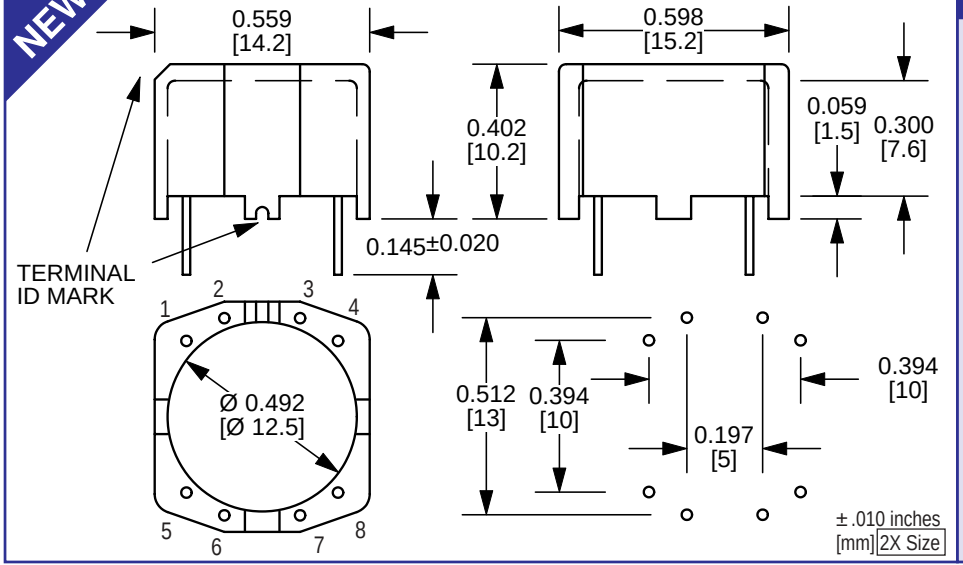

HTC490-4 or HTC490-8

Material:	Nylon 6/6 (Natural)
Rating:	UL 94-VO
4 or 8 Terminals:	Copper / Zinc .026 x .026 60/40 Tin Plated
Solderability:	Per MIL-STD-202 Method 208

Application: Enclosed horizontal mounting of toroidal inductors and transformers up to .492 inches in diameter. Ideal for applications requiring potting, part number marking and automatic pick and place. *8 terminals are available. Standard 4 Terminals available in positions 1, 4, 5, 8. These mounts are available in Anti-Static shipping tubes for automatic pick & place.