


NEW

LARGE TR SERIES

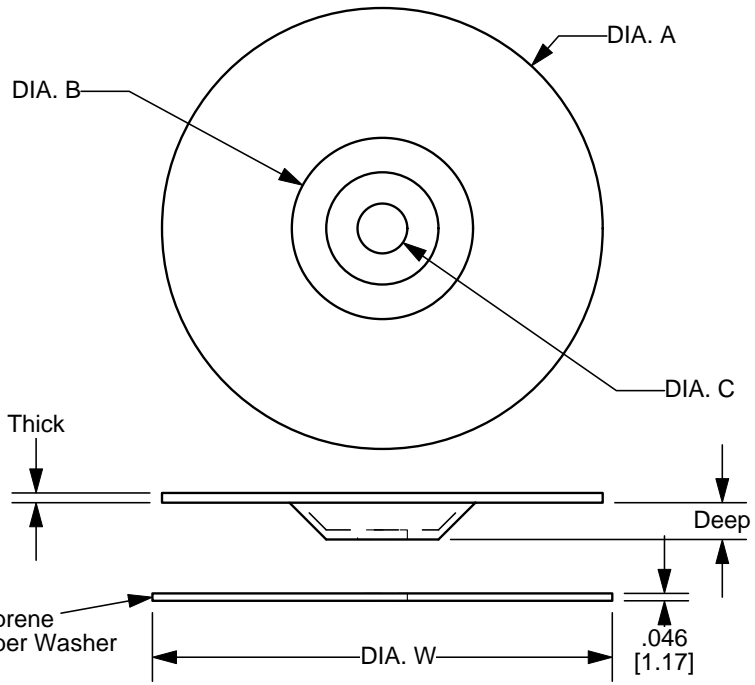

Material: Steel
Electro Zinc Plated

Rating: UL 94-VO

Application: The Toroid Retainer series is designed to bolt toroids from 2.0 to 6.0 inches in diameter to a circuit board or assembly chassis. Neoprene Rubber washers are designed to both insulate and protect the toroid from the pressure of the Retainer. Neoprene washer are sold separately. Steel Toroid Retainers are designed to be used with a Stainless Steel 5/16 bolt nut, and washer, sold separately.

± .010 inches
[mm] [Not to Scale]

Part No.	Dia. A	Dia. B	Dia.C	Thick	Deep	Mat'l	Washer	Dia. W	Mat'l
TR275-C	2.75 [69.8]	1.13 [28.7]	.310 [7.8]	.060 [1.5]	.260 [6.6]	Steel	W275-N	2.87 [72.9]	Neo
TR350-C	3.50 [88.9]	1.25 [30.4]	.310 [7.8]	.060 [1.5]	.280 [7.1]	Steel	W350-N	3.68 [93.5]	Neo
TR450-C	4.38 [111.2]	1.38 [35.0]	.310 [7.8]	.080 [2.0]	.300 [7.6]	Steel	W438-N	4.62 [117.3]	Neo