

SMD165-16

Material: Diallyl Phthalate (Black)




Rating: UL94-VO

16 Terminals: Alloy 42 Leadframe 90/10 Tin Plate

Solderability: Per MIL-STD-202 Method 208

Packaging Tray: TY65x100-A

Application: Gull wing surface mount version of the industry standard "dual-in-line" package. This product is shipped from Lodestone Pacific in anti-static shipping tubes. Encapsulation covers are available and sold separately. See page 9.

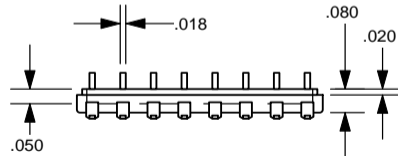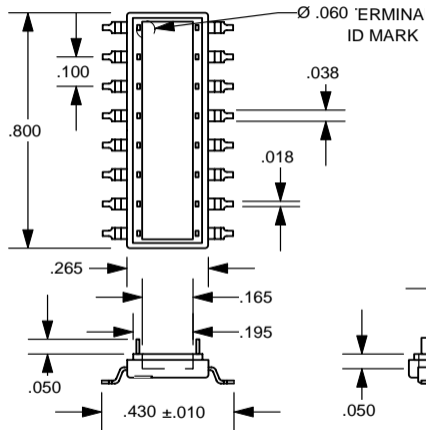

$\pm .010$ inches
[mm] 2X Size