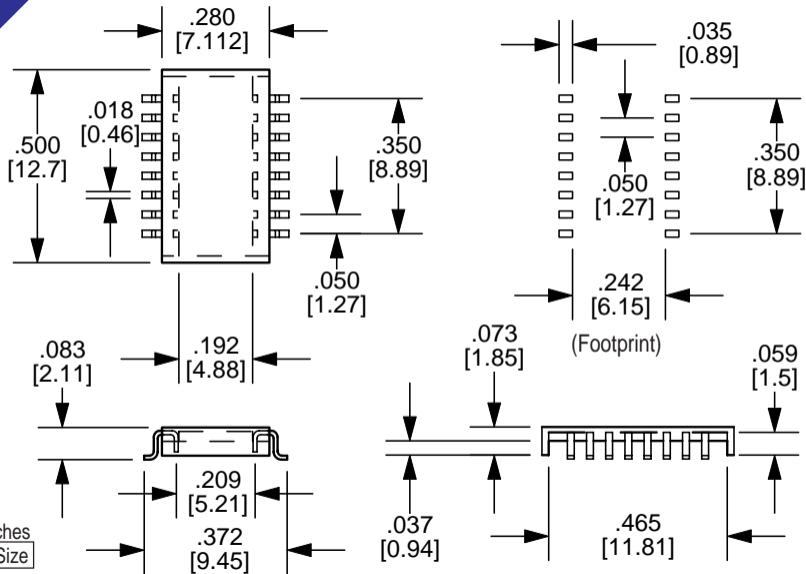


NEW**SMD193-16**

Material: Diallyl Phthalate (Black)

Rating: UL94-VO

16 Terminals: Alloy 42 LeadFrame Tin Plated

Solderability: Per MIL-STD-202 Method 208

Packaging Tray: TY50x50-A

Application: Gull wing surface mount. Suitable for wound toroids up to $.192$ inches in diameter. The toroid is mounted under the mount in a cup like recess. This product is shipped from Lodestone Pacific in anti-static shipping tubes.

$\pm .010$ inches
[mm] 2X Size