


SMD430-24

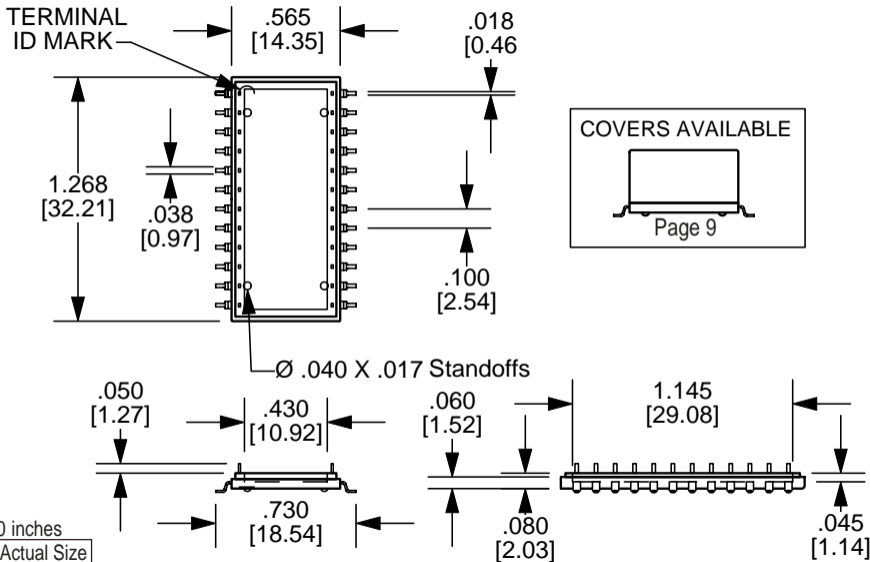

Material:	Diallyl Phthalate (Black)
Rating:	UL94-VO
24 Terminals:	Alloy 42 Leadframe 90/10 Tin Plate
Solderability:	Per MIL-STD-202 Method 208
Packaging Tray:	TY36x82-A

Application: Gull wing surface mount . Suitable for wound toroids up to .430 inches in diameter. This product is shipped from Lodestone Pacific in anti-static shipping tubes. Encapsulation covers are available and sold separately. See page 9.