

# SMRF258-6


**Material:** Alumina  $\text{Al}_2\text{O}_3$  >93%  
(White)

**6 Terminals:** Nickel, Gold Plated

**Solderability:** Per MIL-STD-202  
Method 208

**Packaging Tray:** TY50x50-A

**Application:** For Radio Frequency  
transformer and inductor applications  
requiring low dielectric loss. Ideal for  
small toroids or balun cores.

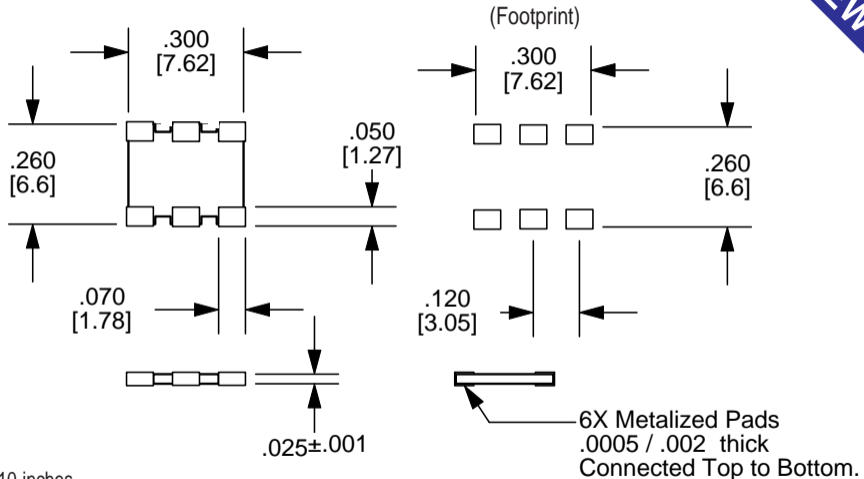

± .010 inches  
[mm] 2X Size

NEW