

STM106-6

Material: Diallyl Phthalate
(Black)


Rating: UL94-VO

6 Terminals: Alloy 42 Leadframe
.008 x .020
90/10 Tin Plate

Solderability: Per MIL-STD-202
Method 208

Packaging Tray: TY50x50-A

Application: For gull wing surface
mount of wound toroids and balun cores
up to .106 inches in diameter or .170
inches long.

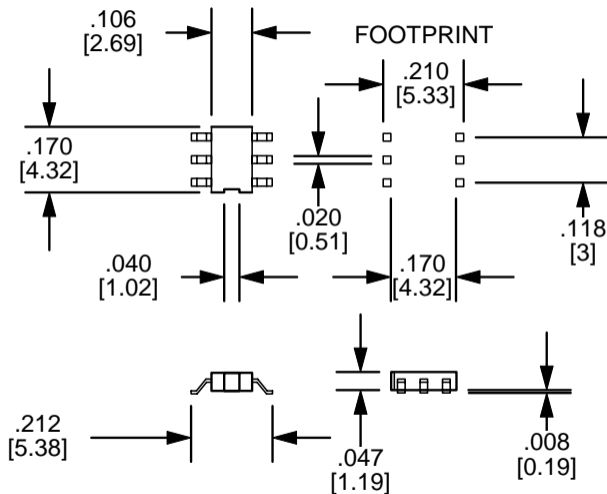

± .010 inches
[mm] 2X Size