

STM180-08/100


Material: LCP (Natural)

Rating: UL94-VO

8 Terminals: Self Leading

Packaging Tray: TY50x50-A

Application: For surface mounting of toroids with wound diameters up to .190 and a max height of .093 inches. The toroid leads are tinned, and wrapped around the tabs on the toroid mount. The toroid leads then make a direct connection to the PCB during infrared solder reflow. Co-planarity is dependant on the quality of the tinned wire wrap on the tabs. This "Shasta" style is a Pulse Engineering design.

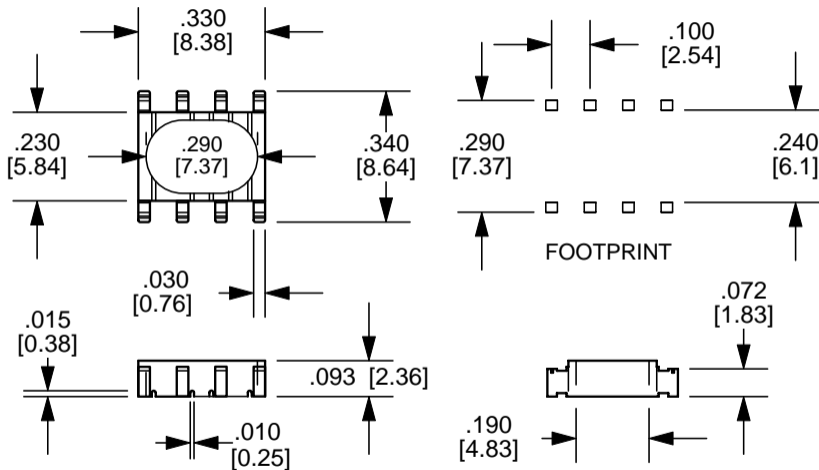

± .010 inches
[mm] 2X Size