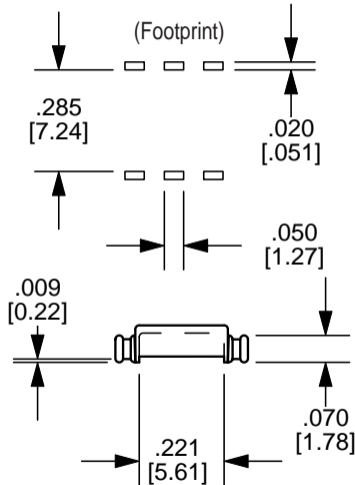
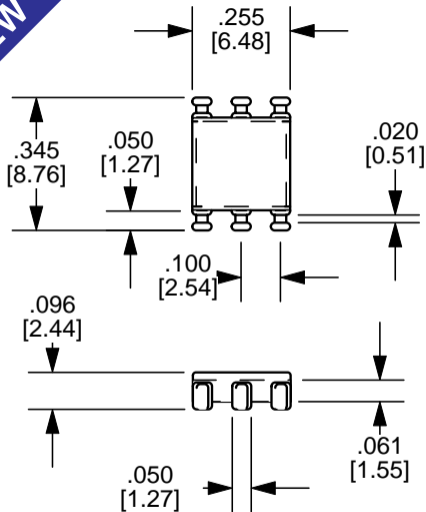


NEW

$\pm .010$ inches
[mm] 2X Size

STM198-06**Material:** LCP (Natural)**Rating:** UL94-VO**6 Terminals:** Self Leading**Packaging Tray:** TY50x50-A

Application: For surface mounting of toroids with wound diameters up to $.221$ and a max height of $.056$ inches. The toroid leads are tinned, and wrapped around the tabs on the toroid mount. The toroid leads then make a direct connection to the PCB during Infrared solder reflow. Coplanarity is dependant on the quality of the tinned wire wrap on the tabs.