


STM240-6

Material:	Diallyl Phthalate (Black)
Rating:	UL 94-VO MIL-STD-2000
6 Terminals:	Alloy 42 .020 x .010 Lead Frame 90/10 Tin Plated
Solderability:	Per MIL-STD-202 Method 208
Packaging Tray:	TY50x50-A

Application: For gull wing surface mounting of components and vertical or horizontal wound toroids up to .240 inches in diameter.

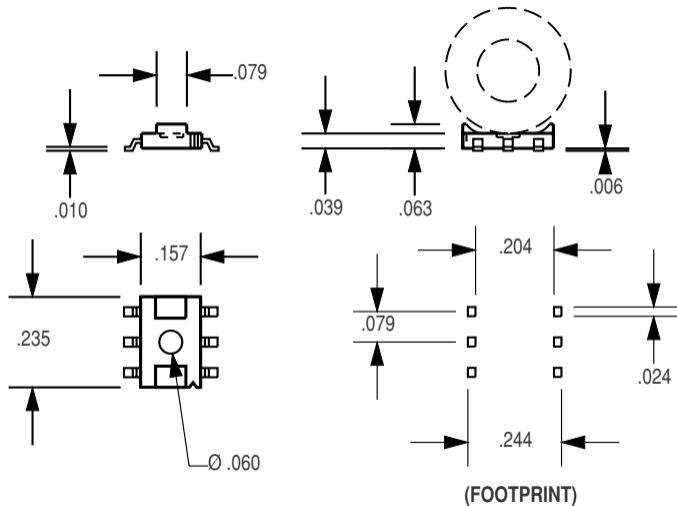

(FOOTPRINT)

$\pm .010$ inches
[mm] 2X Size