


± .010 inches
[mm] 2X Size

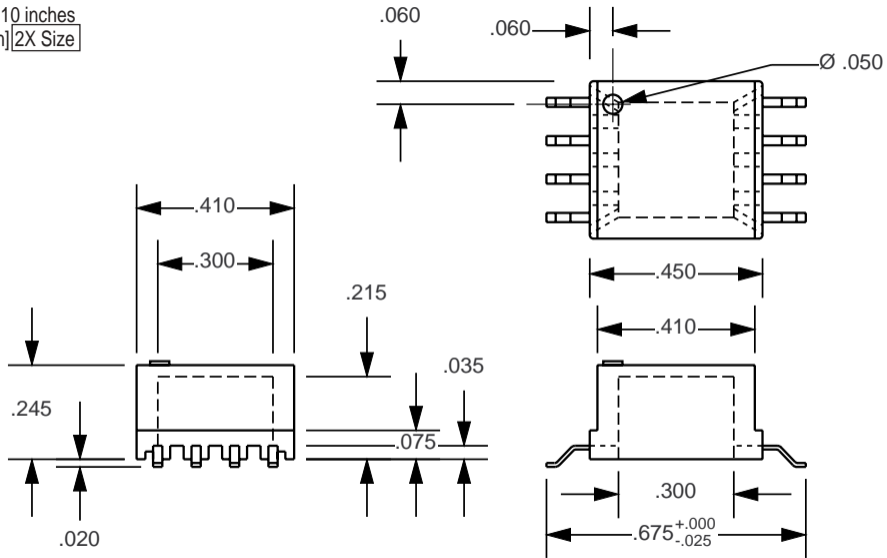

STM300-8

Material:	Phenolic (Black)
Rating:	UL94-VO
8 Terminals:	Alloy 42 .020 x .010 Leadframe Tin Plated
Solderability:	Per MIL-STD-202 Method 208
Packaging Tray:	TY45x70-A

Application: For surface horizontal mounting of components and wound toroids up to .300 inches in diameter.