

## STM305-04


**Material:** Phenolic (Black)

**Rating:** UL94-VO

**4 Terminals:** Self Leading

**Packaging Tray:** TY50x50-A

**Application:** For surface mounting of toroids with wound diameters up to .305 inches. The toroid leads are tinned, and wrapped around the tabs on the toroid mount. The toroid leads then make a direct connection to the solder paste on the printed circuit board pad during infrared solder reflow. Co-planarity is dependant on the quality of the tinned wire wrap on the tabs.

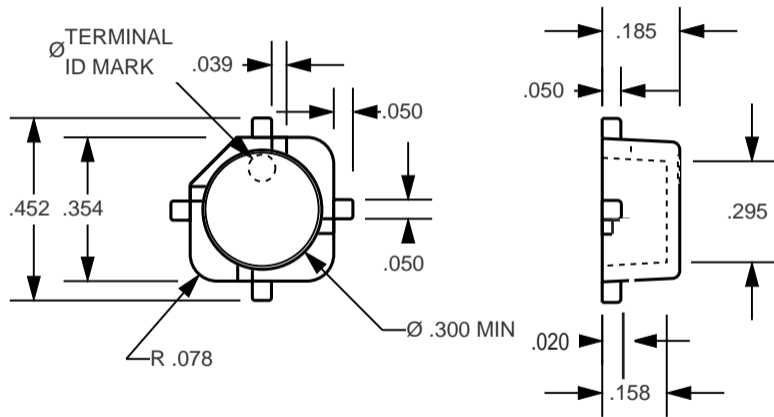

$\pm$  .010 inches  
[mm] 2X Size