
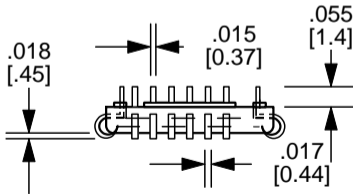
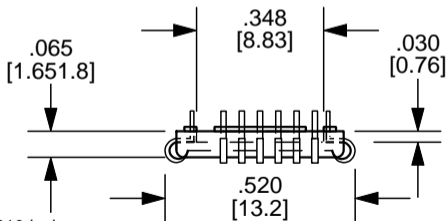
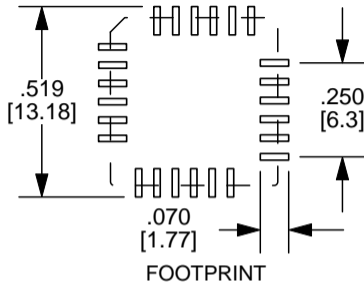


# STM350-24

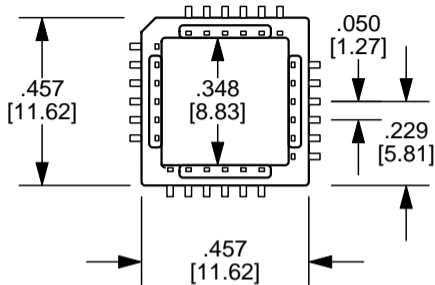

<b>Material:</b>	Diallyl Phthalate (Black)
<b>Rating:</b>	UL94-VO
<b>24 Terminals:</b>	Alloy 42 Leadframe 90/10 Tin Plate
<b>Solderability:</b>	Per MIL-STD-202 Method 208
<b>Packaging Tray:</b>	TY74x77-A

**Application:** "J" Lead surface mount header. Suitable for wound toroids up to .350 inches in diameter. Encapsulation covers are available and sold separately. See page 9.

± .010 inches  
[mm] 2X Size