


STM880-8

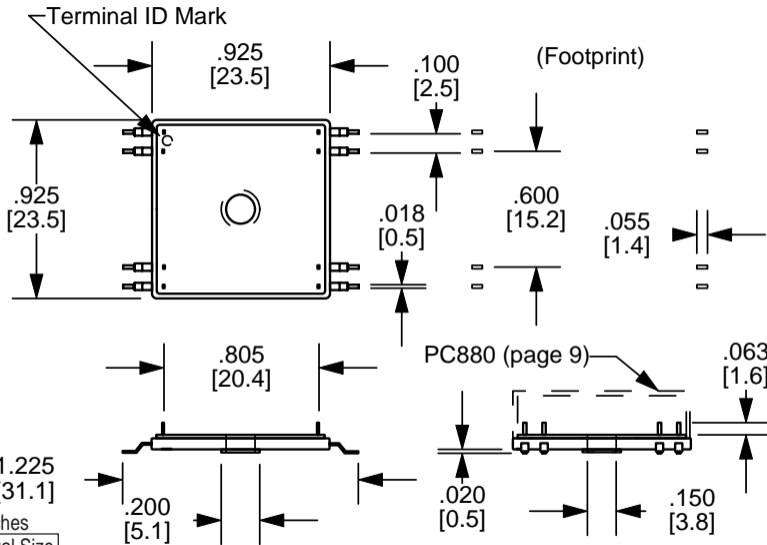

± .010 inches
[mm] Actual Size

- Material:** Diallyl Phthalate (Black)
- Rating:** UL 94-VO
- 8 Terminals:** Alloy 42 Lead Frame 90/10 Tin Plated
- Solderability:** Per MIL-STD-202 Method 208
- Packaging Tray:** TY122x140-A
- Application:** For surface mounting of components, pot cores and wound toroids up to .900 inches in diameter. Potting cup PC880 may be used to encapsulate the component and its connections. (See page 9.)