

# TM505-010


**Material:** Ryton  
(Black)

**Rating:** UL94-VO

**10 Terminals:** Self Leading

**Packaging Tray:** TY74x77-A

**Application:** For mounting components and wound toroids up to .500 inches in diameter. The toroids winding leads pass through holes in the bottom of the cup and are used to make the connection to the PCB.

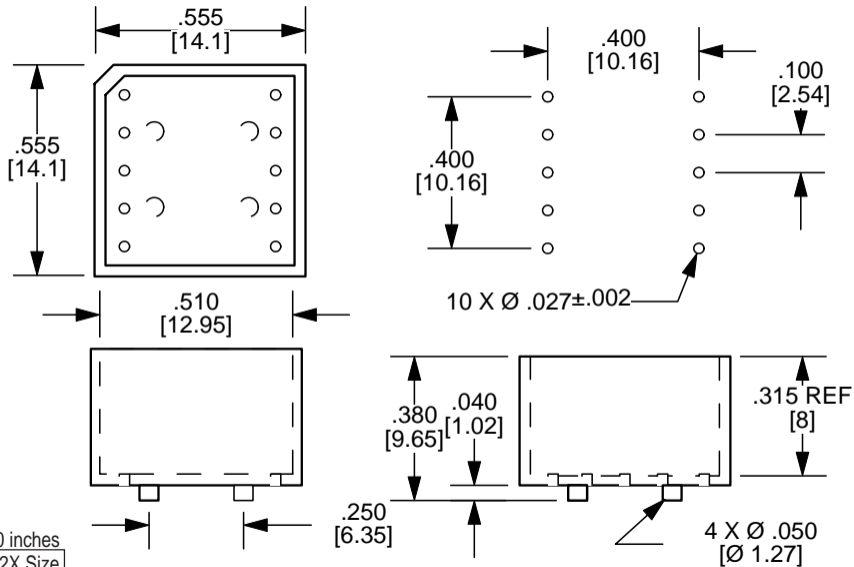

± .010 inches  
[mm] 2X Size