

TM550-8

Material: Diallyl Phthalate
(Black)


Rating: UL 94-VO
MIL-STD-2000

8 Terminals: Alloy 42
.020 x .010
Lead Frame
90/10 Tin Plated

Solderability: Per MIL-STD-202
Method 208

Packaging Tray: TY65x100-A

Application: For horizontal mounting of components and wound toroids up to .550 inches in diameter.

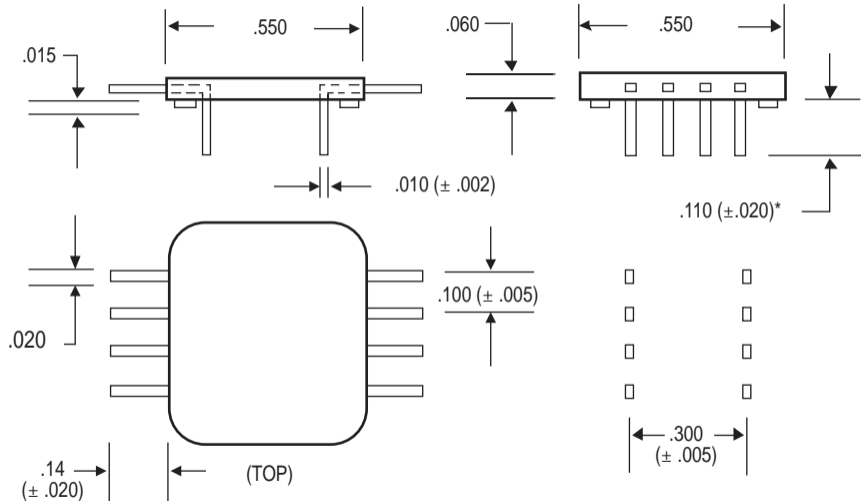

$\pm .010$ inches
[mm] 2X Size