


# VTM681-4

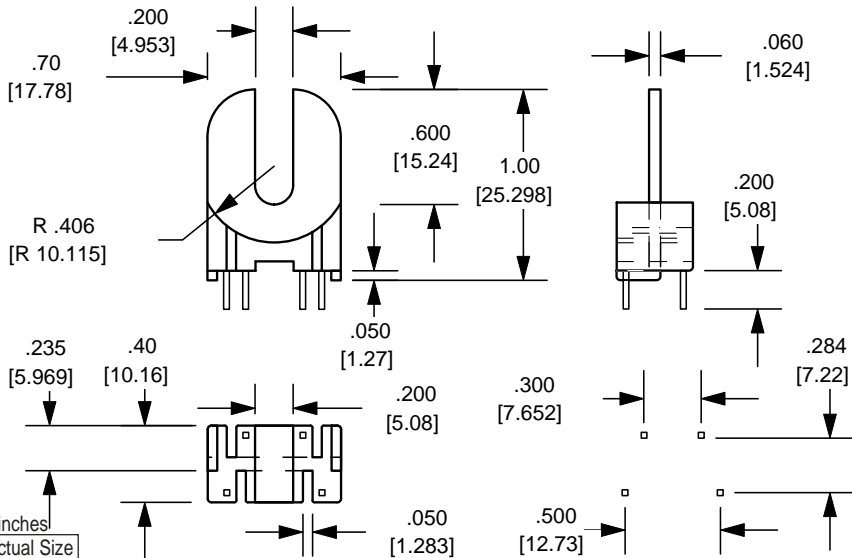

<b>Material:</b>	Rynite (Natural)
<b>Rating:</b>	UL94-VO
<b>4 Terminals:</b>	Copper Zinc .026 x .026 60/40 Tin Plate Nickel Flash
<b>Solderability:</b>	Per MIL-STD-202 Method 208
<b>Packaging Tray:</b>	TY85x116-A
<b>Application:</b>	Designed for vertical mounting of up to two .800 inch wound toroids. Also suitable for current sensing applications.