

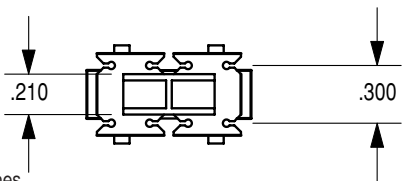
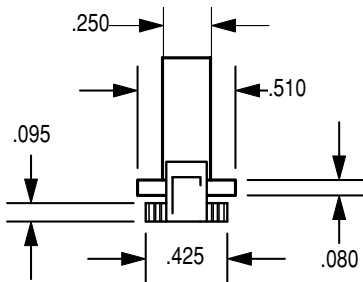


VTM800-08

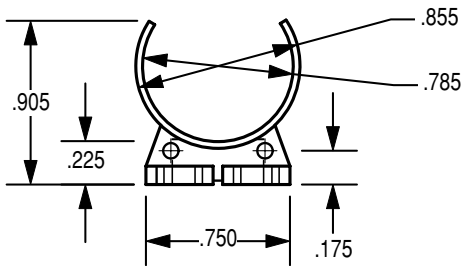

± .010 inches
[mm] Actual Size

- Material:** Zytel FR50 (Natural)
Rating: UL 94-VO
8 Terminals: Self leading
#20 AWG
Solderability: Per MIL-STD-202
Method 208
Packaging Tray: TY122x140-A
Application: Designed for vertical mounting of .800 inch unwound toroids. The mount is designed to have the unwound core placed in the yoke, then to have the wire winding surround the core and yoke, holding the two in a single unit. Up to 8 winding leads are then snapped into the mount base. Best suited for #20 (.034) AWG.