## LODESTONE PACIFIC



Phone: (800) 694-8089 www.lodestonepacific.com

E-mail: sales@lodestonepacific.com


## **STM HCC SERIES**

Material: PPS (Black)
Rating: UL 94-VO

**4 Terminals:** Self Terminating **Package Method**: Bulk in Poly Bags See RoHS compliant PVC packaging trays, or tape and reel options on page 57.

Application: The STM HCC Series is for self leading surface mount low current coupled inductors and transformers. The series will accommodate wound toroidal cores from .600 up to .880 in diameter and uses the toroid's winding leads to surface mount the toroid and case to the printed circuit board. The wound toroid's leads are held in position by the slots and channels incorporated in the mounting case.

This product is the patented property of **Pulse Engineering Inc.**, San Diego, CA.

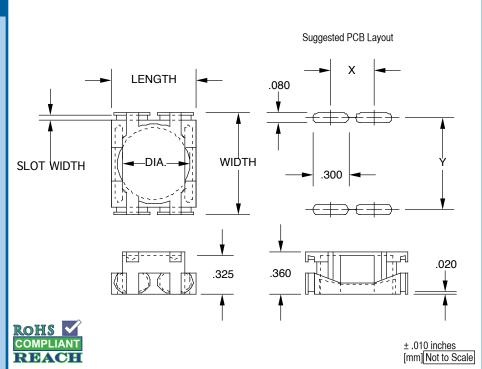

PART NO.	LENGTH	WIDTH	DIA.	X	Υ	SLOT WIDTH	WIRE SIZE	PACKAGING TRAY
STM44HCC-04	.700 [17.7]	.850 [21.6]	.600 [15.2]	.360 [9.1]	.770[19.6]	.045 [1.0]	#22 to #18	TY85x116-A
STM50HCC-04	.780 [19.8]	.895 [22.7]	.680[17.3]	.440 [11.2]	.810 [20.6]	.045 [1.0]	#22 to #18	TY85x116-A
STM68HCC-04	.980 [24.9]	1.090 [27.7]	.880 [22.3]	.620 [15.7]	1.010 [25.6]	.055 [1.4]	#20 to #16	TY122x140-A



Request samples and literature and have them ship to you same day. www.lodestonepacific.com/samplepricing.php



Search for a part to match your applications, download the .pdf www.lodestonepacific.com/selectoroid.php







have it e-mailed to you same day. www.lodestonepacific.com/quote.php

