

LODESTONE PACIFIC



Phone: (800) 694-8089
www.lodestonepacific.com
E-mail: sales@lodestonepacific.com


TM475-8

Material: PH3 (Black)
UL Rating: UL94-VO, Class F
8 Terminals: .028 [7mm] CP Wire
100% Tin Plate
Solderability: Per MIL-STD-202
Method 208

Package Method: Bulk in Poly Bags
See RoHS compliant PET packaging trays
options on page 47.

Application: For horizontal mounting
of transformer and inductor applications
using a wound toroid up to .475 inches in
diameter.

Made in our China Factory

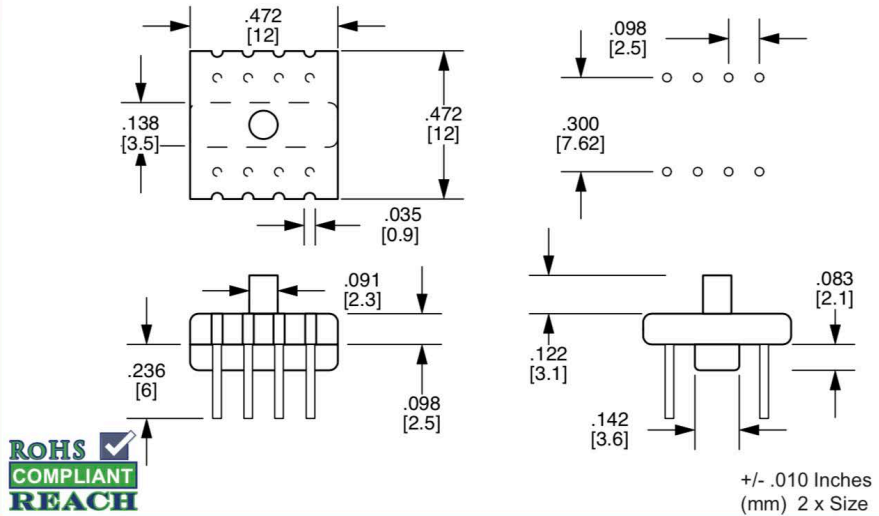

[Request a Sample](#)

[View Inventory](#)

[Request a Quote](#)

[Toroid Mount Selector](#)

[REACH Database](#)

[Coil Winder Database](#)