

LODESTONE PACIFIC




Phone: (800) 694-8089
www.lodestonepacific.com
E-mail: sales@lodestonepacific.com

VTM880-10

Material: GFN (Natural)
UL Rating: UL94-VO, Class F
10 Terminals: CP Wire .020 [.5] Sq.
100% Tin Plate
Solderability: MIL-STD-202
Method 208
Packaging: Bulk in Polybags
Application: For vertical mounting of
wound toroids from .600 to 1.200 inches
in diameter with up to 10 terminations.

Made in our China Factory

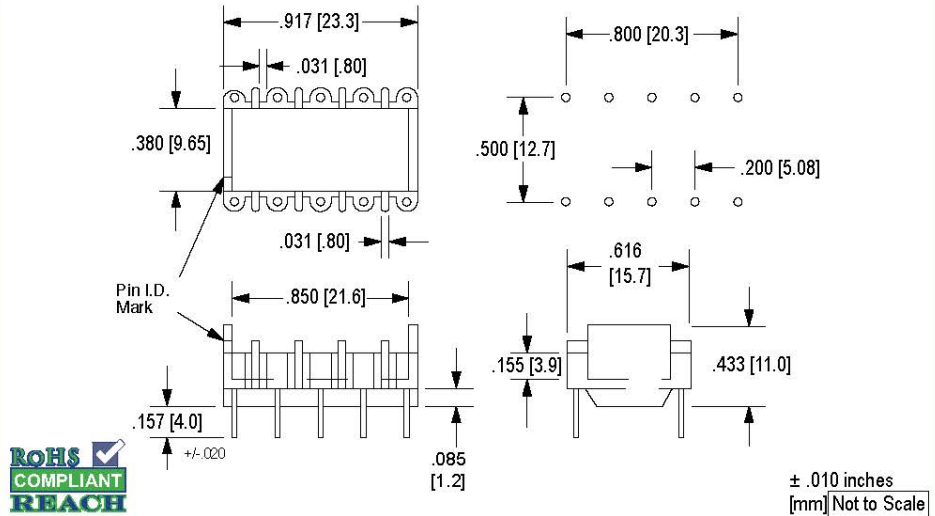

[Request a Sample](#)

[View Inventory](#)

[Request a Quote](#)

[Toroid Mount Selector](#)

[REACH Database](#)

[Coil Winder Database](#)