

LODESTONE PACIFIC



Phone: (800) 694-8089
www.lodestonepacific.com
E-mail: sales@lodestonepacific.com


VTM650-6

Material: PH3 (Black)
UL Rating: UL94-V0, Class F
6 Terminals: CP Wire
100% Tin Plate
Solderability: Per MIL-STD-202
Method 208

Package Method: Bulk in Poly Bags
See RoHS compliant PVC packaging tray options on page 57.

Application: For vertical mounting of inductor, transformer and current sensor applications using a wound toroid up to .650 inches in diameter.

Made in our China Factory

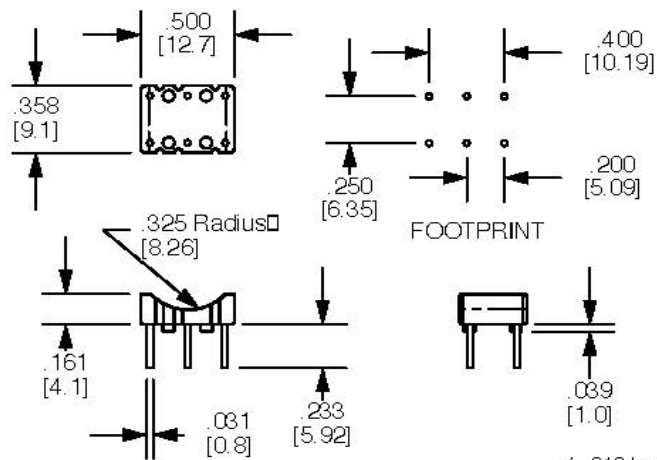

+/- .010 Inches
(mm) Actual Size



[Request a Sample](#)

[View Inventory](#)

[Request a Quote](#)

[Toroid Mount Selector](#)

[REACH Database](#)

[Coil Winder Database](#)