

LODESTONE PACIFIC




Phone: (800) 694-8089
 www.lodestonepacific.com
 E-mail: sales@lodestonepacific.com

10 Terminal VTM Series

Material: GFN (Natural)
UL Rating: UL94-VO, Class F
Terminals: CP Wire
 100% Tin Plate
Solderability: MIL-STD-202
 Method 208
Packaging: Bulk in Polybags
Application: For vertical mounting of wound toroids from .600 to 1.200 inches in diameter.

Made in our China Factory

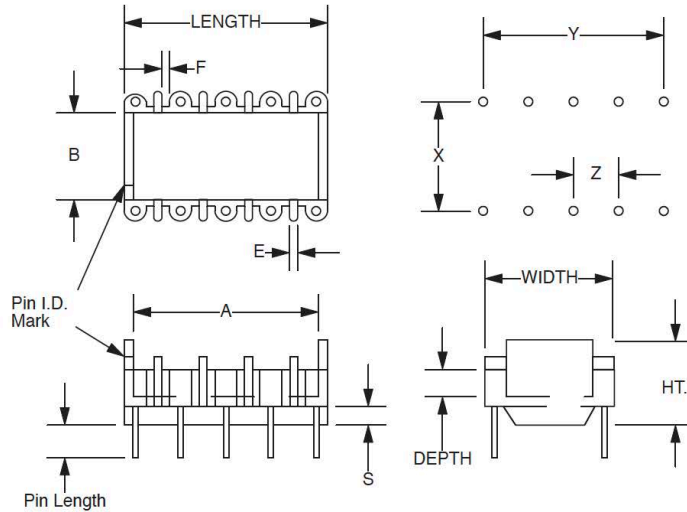

± .010 inches
 [mm] [Not to Scale]

Part No.	Term. Size	Pin Length
VTM880-10	.020x.020 [.50x.50]	.157 [4.0]
VTM1020-10	.027x.027 [.70x.70]	.177 [4.5]
VTM1220-10	.027x.027 [.70x.70]	.177 [4.5]

Part No.	Length	Width	A	B	Ht.	Depth	E	F	X	Y	Z
VTM880-10	.917 [23.3]	.618 [15.7]	.850 [21.6]	.380 [9.65]	.433 [11.0]	.155 [3.9]	.031 [.79]	.031 [.79]	.500 [20.3]	.800 [20.3]	.200 [5.08]
VTM1020-10	1.10 [28.0]	.701 [18.0]	1.00 [25.4]	.467 [11.9]	.472 [12.0]	.148 [3.8]	.055 [1.4]	.040 [1.0]	.591 [15.0]	.984 [25.0]	.246 [6.30]
VTM1220-10	1.30 [33.0]	.906 [23.0]	1.17 [29.7]	.670 [26.4]	.512 [13.0]	.120 [3.1]	.086 [2.2]	.050 [1.3]	.787 [20.0]	1.18 [30.0]	.295 [7.50]

[Request a Sample](#)

[View Inventory](#)

[Request a Quote](#)

[Toroid Mount Selector](#)

[REACH Database](#)

[Coil Winder Database](#)