


LODESTONE PACIFIC



Phone: (800) 694-8089
 www.lodestonepacific.com
 E-mail: sales@lodestonepacific.com

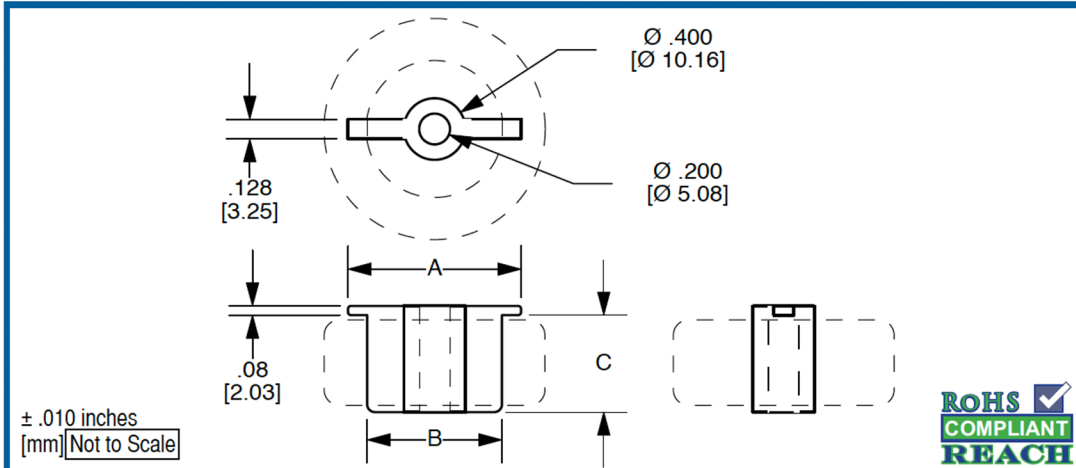

HTS SERIES

Material: GFN (Natural)
UL Rating: UL94-VO, Class F
Package Method: Bulk in Polybags
Application: These horizontal spacers are for common mode chokes requiring voltage isolation. The hole through the center will allow a 10-32 bolt to secure the coil to a PCB, chassis, or to horizontal mounting platforms TM1850 and TM2300 (page 44) or XM Series (page 42).

- M185:** Nylon #10 hex nut
- M187:** Nylon 10-32 x 1.5 inch bolt (Sold separately)

Made in our China Factory

Part No.	A	B	C	DIA.	HOLE	BOLT SIZE
HTS89-07	1.125 [28.6]	.880 [22.3]	.485 [12.3]	.400 [10.2]	.200 [5.1]	10-32
HTS73-01	1.020 [25.9]	.715 [18.2]	.900 [22.9]	.400 [10.2]	.200 [5.1]	10-32
HTS130-10	1.750 [44.5]	.525 [13.3]	.525 [13.3]	.400 [10.2]	.200 [5.1]	10-32

[Request a Sample](#)

[View Inventory](#)

[Request a Quote](#)

[Toroid Mount Selector](#)

[REACH Database](#)

[Coil Winder Database](#)