

LODESTONE PACIFIC



Phone: (800) 694-8089
 www.lodestonepacific.com
 E-mail: sales@lodestonepacific.com

VTB SERIES


Material: DAP (Black)
 Rynite (Black)
 GFN (Natural)

UL Rating: UL94-VO, Class F

Packaging: Bulk in Polybags

Application: For vertical mounting of wound toroids. The toroid leads go through the cup holes for PCB soldering. Potting material or epoxy can be used to hold the toroids in the cups.

VTB800-02 and VTM900-02 have only two terminal holes along the center line.

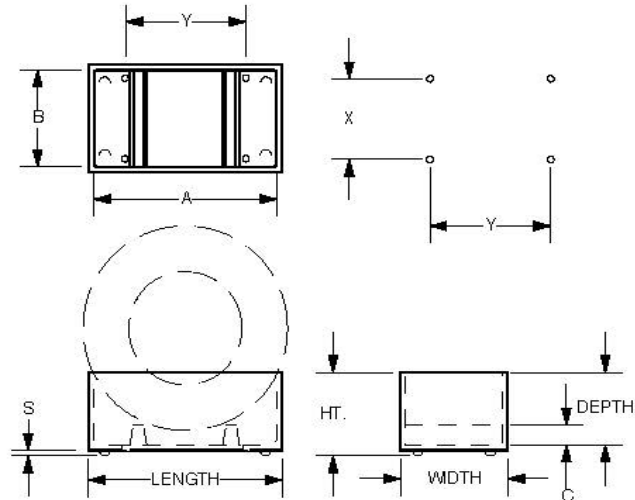

± .010 inches
 [mm] [Not to Scale]

PART NO.	LENGTH	WIDTH	A	B	C	HT.	DEPTH	S	Y	X	Mat'l
VTB700-04	.795 [20.1]	.480 [12.1]	.755 [19.1]	.440 [11.1]	—	.340 [8.6]	.275 [6.9]	.045 [1.1]	.625 [15.8]	.375 [9.5]	Rynite
VTB800-02	.825 [20.9]	.430 [10.9]	.780 [19.8]	.385 [9.8]	—	.295 [7.5]	.230 [5.8]	.035 [8]	.300 [7.6]	----	Zytel
VTB1090-04	1.13 [28.7]	.545 [13.8]	1.08 [27.4]	.490 [12.4]	—	.450 [11.4]	.405 [10.2]	.015 [4]	.800 [20.3]	.400 [10.1]	Rynite
VTB1350-04	1.435 [36.4]	.795 [20.1]	1.355 [34.4]	.715 [18.1]	.150 [3.8]	.575 [14.6]	.500 [12.7]	.040 [1.0]	.900 [22.8]	.600 [15.2]	Rynite
VTB1850-04	1.940 [49.2]	.900 [22.8]	1.865 [47.3]	.825 [20.9]	.190 [4.8]	.780 [19.8]	.700 [17.7]	.040 [1.0]	1.200 [30.4]	.700 [17.7]	DAP
VTB2200-04	2.290 [58.1]	1.105 [28.0]	2.210 [56.1]	1.025 [26.0]	.150 [3.8]	.920 [23.3]	.840 [21.3]	.040 [1.0]	1.500 [38.1]	.900 [22.8]	DAP

[Request a Sample](#)

[View Inventory](#)

[Request a Quote](#)

[Toroid Mount Selector](#)

[REACH Database](#)

[Coil Winder Database](#)