


TECHNICAL DATA

FILAMENT TAPE Product Code: 1PG880

P. LEO & CO LTD

P.O. Box 175 Fo Tan, Shatin, Hong Kong.
Telephone : (852) 2604-8222 * Facsimile : (852) 2693-2093
E-mail : sales@pleo.com * Web Site : <http://www.pleo.com>

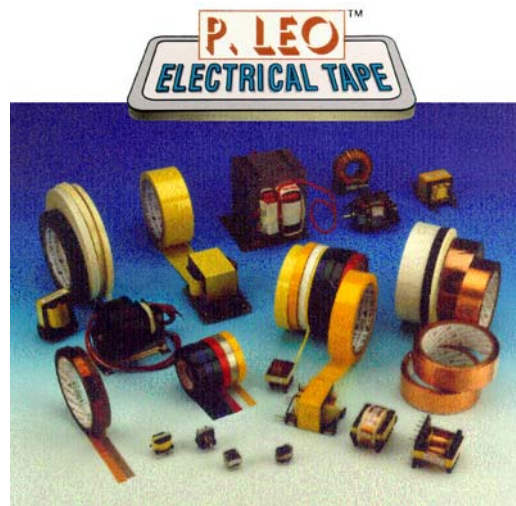

UL FILE #E126174

Description :	Polyester film, glass filament tape coated with <u>rubber</u> adhesive.		
Application :	Good for heavy duty holding applications.		
Features/Benefits :	Both products have tensile strength, designed for holding applications in coil manufacturing Excellent quick tack and non-flagging characteristics.		
Technical Details :	<u>PROPERTIES</u>	<u>UNIT</u>	<u>SPECIFICATION</u>
	TOTAL THICKNESS	mm	0.15 ± 0.02
	TENSILE STRENGTH	kg/25mm	100
	ELONGATION AT BREAK	%	5
	ADHESION TO STEEL	kg/25mm	1.6
	BREAKDOWN VOLTAGE	kV	5
	HOLDING POWER	mm	3
	HEAT RESISTANCE	°C	130
Availability :	Standard 50M roll, 3" core, width 950mm		
Shelf Life :	6 months when storage at 23°C and 65% relative humidity		

Important Notice to Purchase

All Statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed and the following is made in lieu of all warranties, express or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury loss or damage direct or consequential arising out of the use of or "he inability to use the product. Before using users shall determine the suitability of the product for their intended uses and users assume all risk and liability whatsoever in connection there with.

No statement or recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of Seller and manufacturer.

